



# Archived resources

For further resources and  
documentation please visit us:  
**[www.cinos.net](http://www.cinos.net)**


High Visibility & Anti Reflection Treatment

# 42"/47"/55" HIGH-BRIGHTNESS DISPLAY WX30



## HIGH BRIGHTNESS DISPLAY

• 700 cd/m<sup>2</sup> + Anti-Reflection Treatment Display  
 Perfect fit for window display by reflecting away the sunlight for best image visibility and clearer display under direct sunlight than conventional panel.

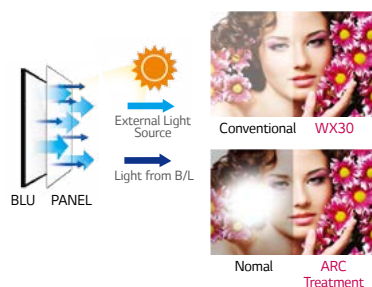

## WIDE VIEWING ANGLE

• IPS Panel with Anti-Reflection treatment provides the clear image in high picture quality and readability virtually at any angle



## STYLISH SLIM DESIGNED DISPLAY

• Narrow Even Bezel (11.5mm)  
 • Slim depth (31mm)



WX30 42"/47"/55"

## Semi-Outdoor Display

**WX30** 42", 47", 55"**FEATURES****IPS Panel**


- Low Screen Temperature on Standard Mode
- No Blackening Defect
- Wide Viewing Angle

**High Visibility**

- 700 cd/m<sup>2</sup> + Anti-Reflection Treatment

**SPECIFICATIONS**

WX30			WX30			
PANEL	Screen Size	42" / 47" / 55"	SPECIAL FEATURES	Brightness / Contrast / Backlight	Yes	
	Panel Technology	IPS		Position / Size	Yes	
	Aspect Ratio	16 : 9		Auto Config / Phase	Yes	
	Native Resolution	1920 x 1080 (FHD)		Energy Saving	Yes (Minimum, Medium, Maxium)	
	Brightness	700 cd/m <sup>2</sup> Typ		Smart Energy Saving	Yes	
	Contrast Ratio	1,300:1		Operation Temperature	0 °C to 40 °C	
	Dynamic CR	500,000:1		Operation Humidity	10 % to 80 %	
	Viewing Angle (H x V)	178 x 178		POWER	Power Supply	100~240V, 50/60Hz
	Response Time	12 ms(G to G), 8ms (G to G, WOT)			Typ	130 W
	CONNECTIVITY	Input (Rear)		Digital	HDMI(1), DVI-D(1), Display Port(1) with HDCP for all input	Power Consumption
Analog			Component(1), Composite(1), RGB(1) (Shared with D-Sub)	DPM	0.7W	
Audio			RGB/DVI-D/AV/Component (3.5Ø 1)	Power off	0.5 W	
External Control		External Control	RS232C(1), RJ45(1), IR(1)	STANDARD (CERTIFICATION)	Safety	UL, cUL, CB scheme, TUV
		USB	USB 2.0 x 1		EMC	FCC Class "A", VCCI, CE, KCC
		HDTV Formats	Component : 720p, 1080i, 1080p HDMI : 720p, 1080i, 1080p		ErP / Energy Star	Yes / Yes (Energy Star 6.0)
Output (Rear)		Digital	DVI-D(1)	MEDIA PLAYER COMPATIBILITY	Slot PC Compatible (Optional)	No
		Analog	Component(1), Composite(1), RGB(1) (Shared with D-Sub)		External Media Player Attatchable	No
		Audio	External Speaker	SOFTWARE COMPATIBILITY	SuperSign elite-w & lite	Yes (Editing, Scheduling, Distribution & Play, Control)
		External Control	RS232C(1), IR(1)		SuperSign elite -c	Yes
PHYSICAL SPECIFICATION	Bezel Width	42": 11.5mm, 47": 11.2mm	ACCESSORY	Included	Remote Controller / Power Cable / RGB Cable / Manual / ESG / IR Receiver	
	Monitor Dimension (W x H x D)	42": 96.16cm x 55.45cm x 3.19cm		Option	Speaker	SP-2000
		47": 107.18cm x 61.6cm x 3.1cm	Stand		ST-200T	
		55": 124.2cm x 71.3cm x 5.4cm	* Image may differ slightly from actual product. Specifications are subject to change without prior notice.			
	Weight (Head)	42": 13.7kg, 47": 15.7kg, 55": 23.5kg				
	Carton Dimensions (W x H x D)	42": 108.5cm x 74.0cm x 12.5cm				
		47": 119.7cm x 77.0cm x 14.0cm				
		55": 32.4cm x 85.8 cm x 15.9cm				
	Packed Weight	42": 17.2kg, 47": 19.4kg, 55": 28.5kg				
	VESA™ Standard Mount Interface	400mm x 400mm				
Temperature Sensor	Yes					
Auto Brightness Sensor	No					

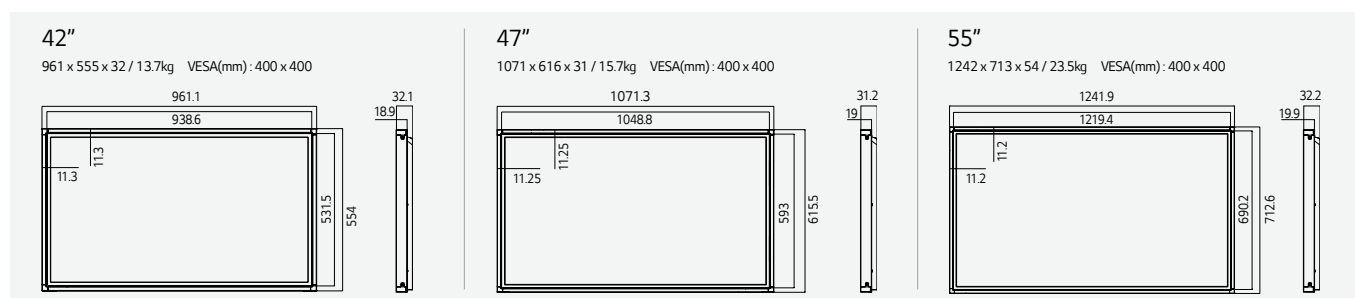**DIMENSION (unit : mm)**

For further resources and  
documentation please visit us:  
**[www.cinos.net](http://www.cinos.net)**